4020 series
40x40x20 mm

P&Q Curve

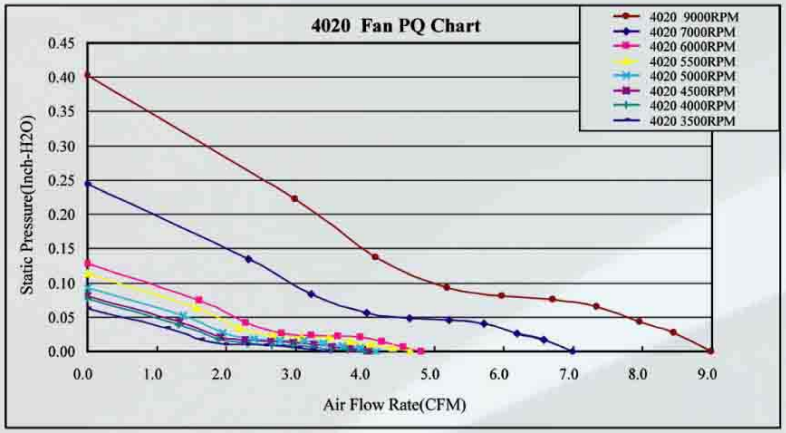

Dimensions Drawing

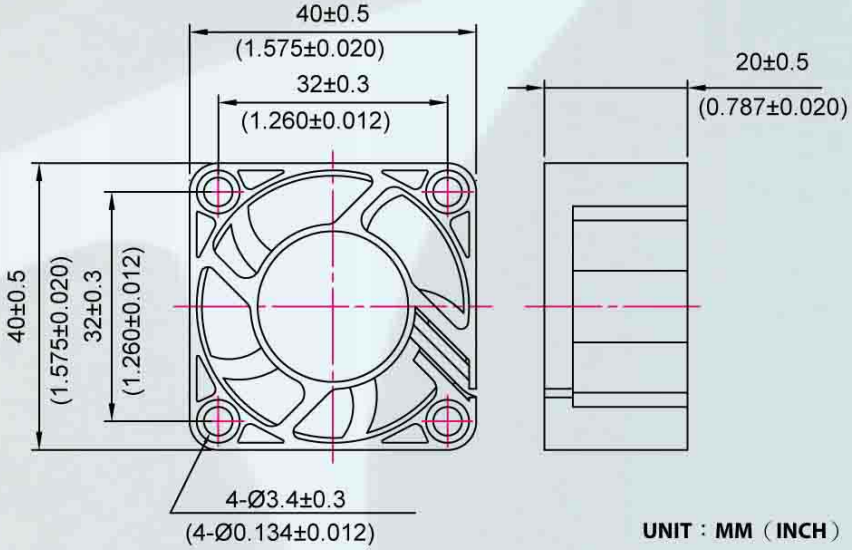

UNIT : MM（INCH）

Specitications

- Material : impeller & Frame : Plastic(UL 94V-O)
- Lead Wires :
  UL 1007 AWG#28 Or Equivalent
  Red Wire Positive(+), Black Wire Negative(-), Yellow Wire Or Blue Wire Signal(FG)
- Function type is optional
- The max air flow and the speed are measured in free air; max air pressure is measured at zero air flow
- Noise is measuerd in anechoic chamber in free air, one meter from intake side
- All readings are typical values at rated voltage
- Specifications are subject to change with notice
- Additional special function may be added according the requirement of customer

Model	Rated Voltage (VDC)	Rated Current (AMP)	Power Consumption (WATTS)	Speed Reference (RPM)	Air Flow (CFM)	Ssatic Pressure (Inch-H_2O)	Noise (dBA)
TFD-4020TH05X	5	0.2	1	7000	6.99	0.24	<27
TFD-4020HH05X	5	0.16	0.8	6000	4.82	0.13	<25
TFD-4020H05X	5	0.14	0.7	5500	4.65	0.11	<23
TFD-4020M05X	5	0.12	0.6	5000	4.17	0.09	<21
TFD-4020L05X	5	0.1	0.5	4500	4.05	0.08	<20
TFD-4020LL05X	5	0.08	0.4	4000	3.98	0.07	<19
TFD-4020SL05X	5	0.07	0.35	3500	3.45	0.06	<18
TFD-4020SH12X	12	0.14	1.68	9000	8.99	0.4	<32
TFD-4020HH12X	12	0.11	1.32	6000	4.82	0.13	<25
TFD-4020H12X	12	0.1	1.2	5500	4.65	0.11	<23
TFD-4020M12X	12	0.08	0.96	5000	4.17	0.09	<21
TFD-4020L12X	12	0.06	0.72	4500	4.05	0.08	<20
TFD-4020LL12X	12	0.05	0.6	4000	3.98	0.07	<19